

Deye Cloud App

Wi-Fi Configuration Operation Manual

Cuiji Technology (Shanghai) Co., Ltd

Address: No.9, Lane 280, Linhong Road, Changning District,
Shanghai, China

Customer Service Hotline:

Customer Service E-mail:


Method 1: Wi-Fi configuration under the plant page:

Step 1 Select a Plant-Device-Logger and tap **【Wi-Fi configuration】** ;

Step 2 Jump to the Wi-Fi configuration page, APP will default to obtaining the present network connected with the phone;


【Switch Network】 is optional and the new currently available wireless network could be entered manually;

Step 3 Enter the password for the WLAN;

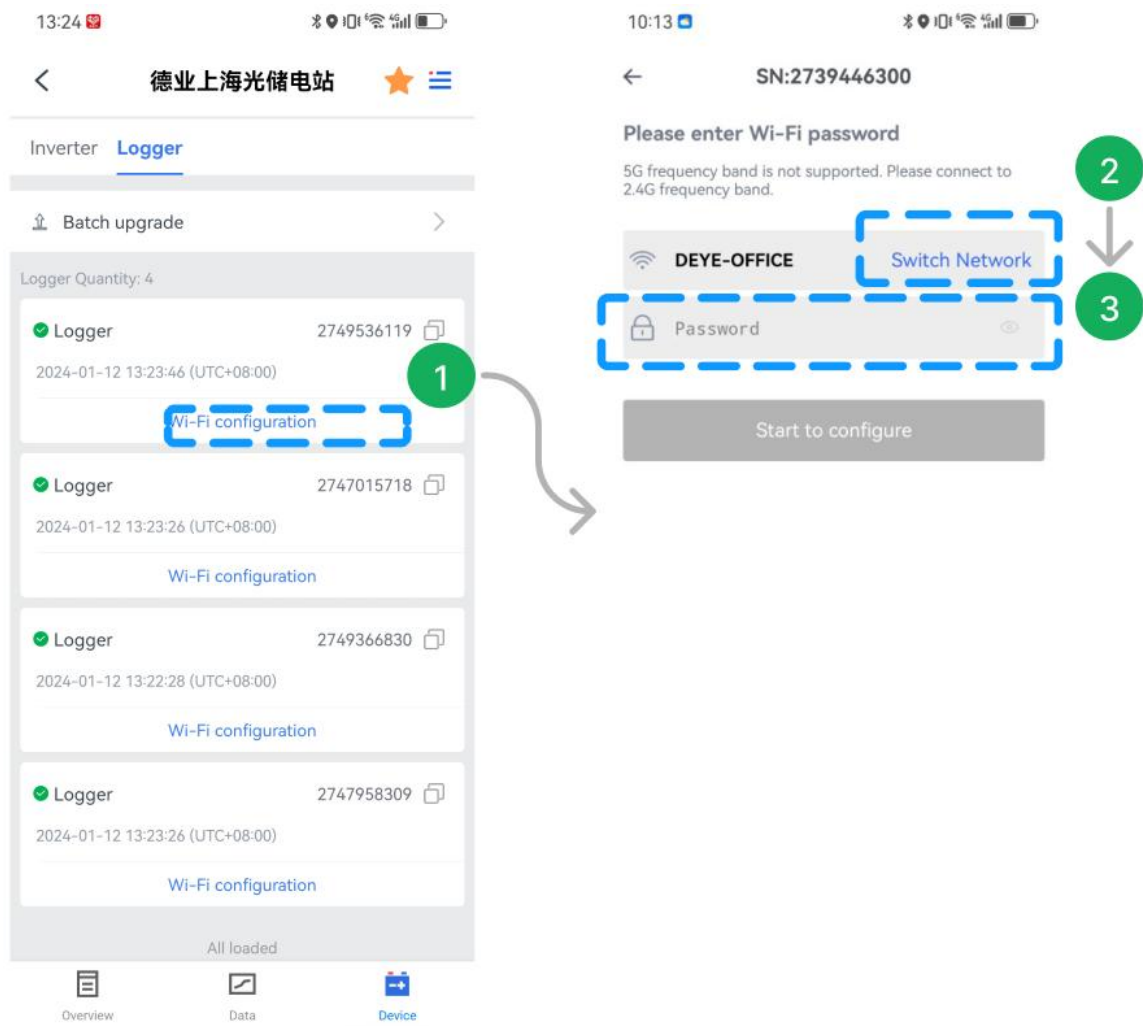

Step 4 Tap **【Start to configure】**


Step 5 Wi-Fi configuration being executed;

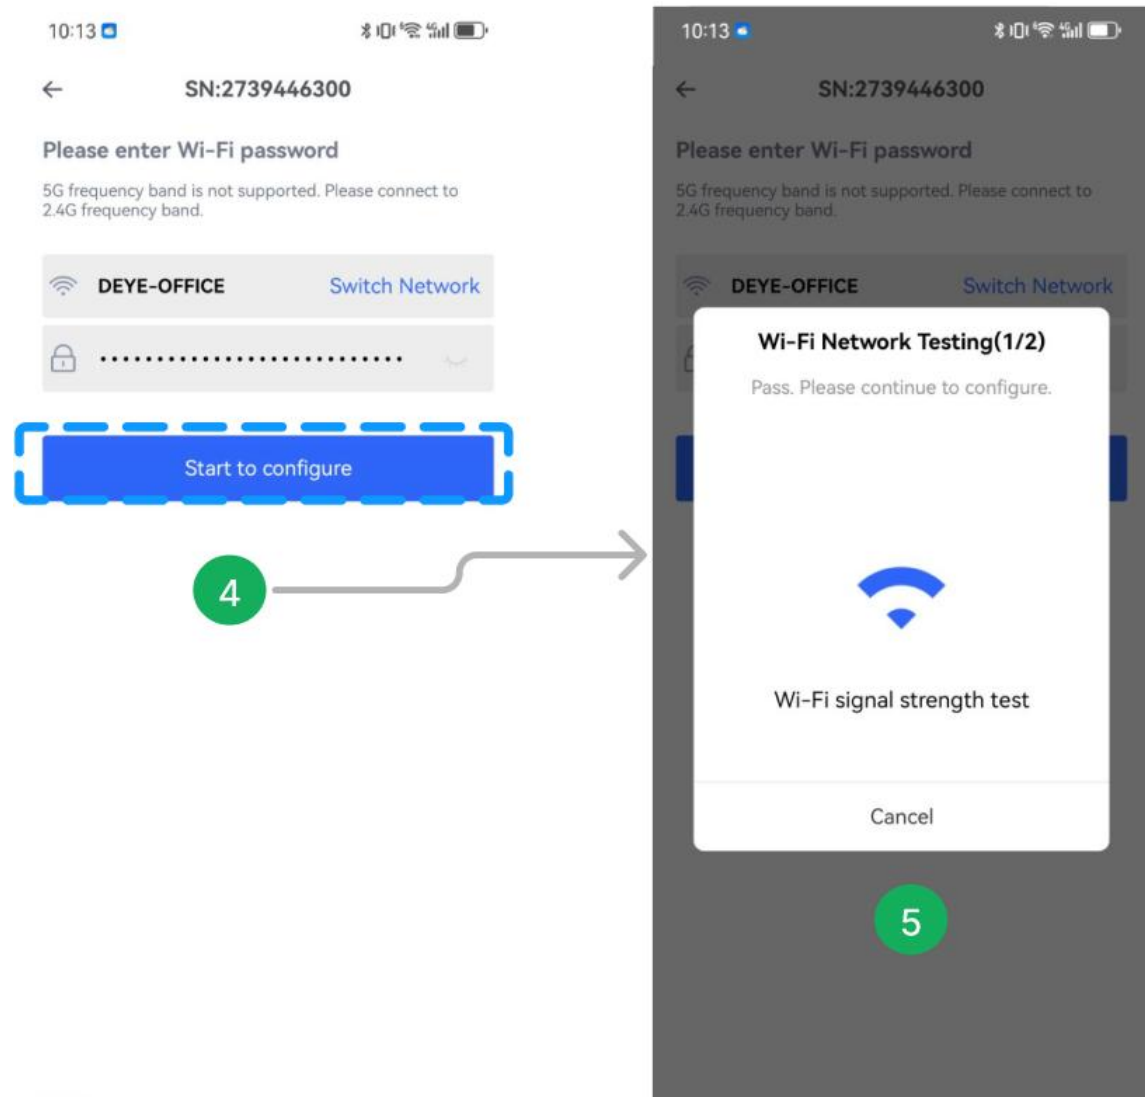

Step 6 Tap **【Connect】** to configure logger in the WLAN;


Step 7 Select the WLAN (AP+SN) prompted by the system and enter the password on the logger;

Step 8 Tap **【←】** and back to APP;

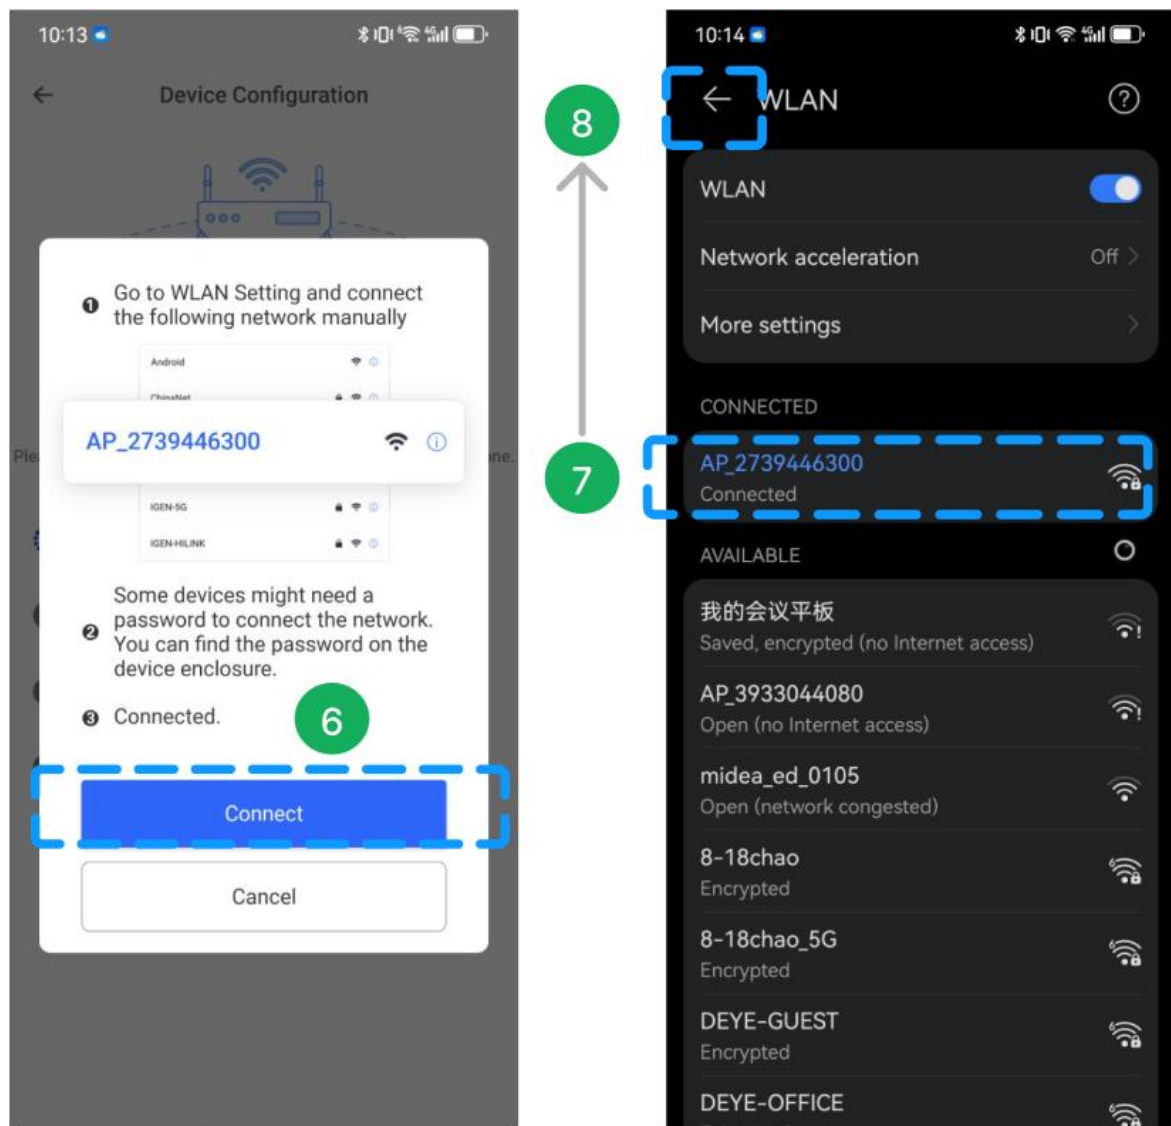


Step 9 Connect to device, Configuring, Restart and Verified are executed;

Step 10 After the page displaying “Configuration succeeded” , tap **【Done】** to close the page and back to the device list.

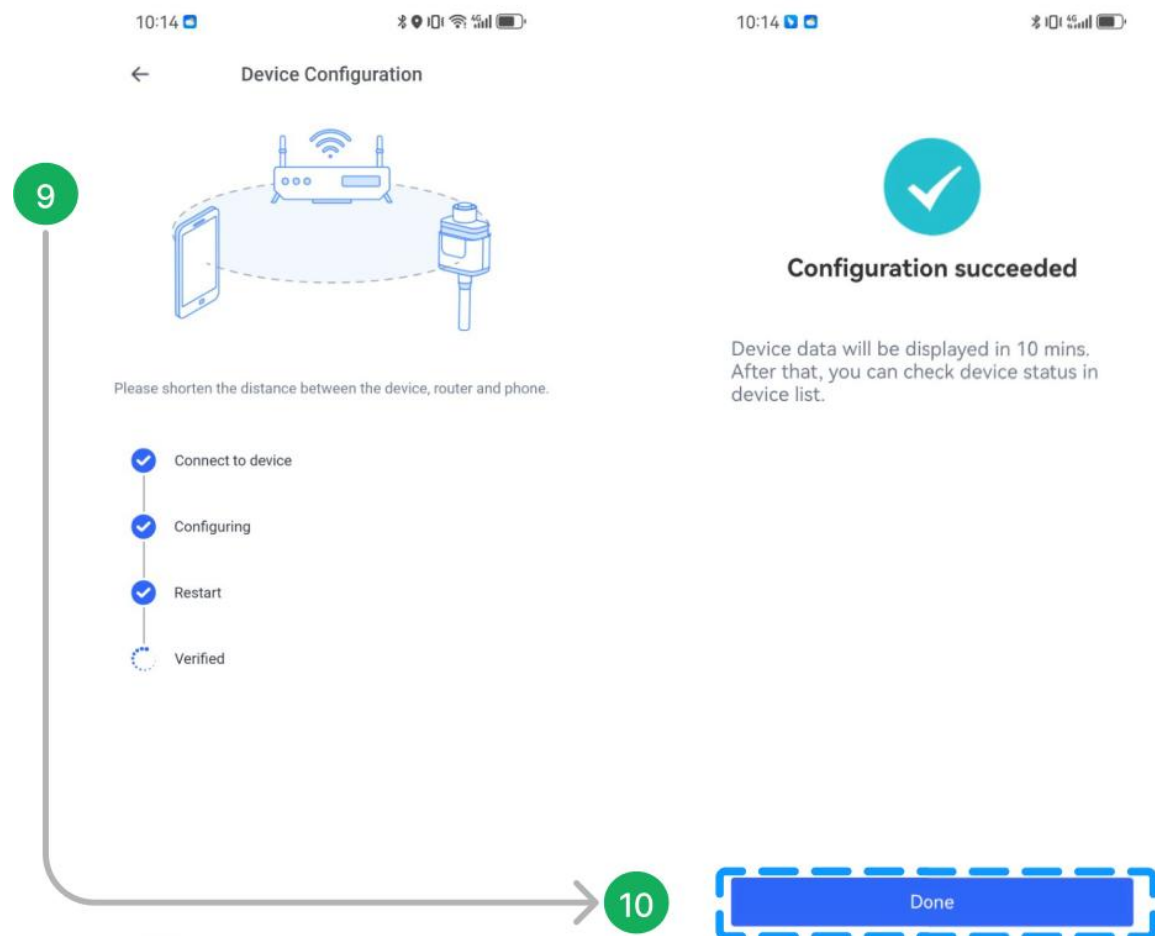


Method 2: Generic Wi-Fi configuration:

- Step 1 Tap on the top right corner of the plant list ;
- Step 2 Tap **【Wi-Fi Configuration】** ;
- Step 3 Scan the QR code on the logger;
- Step 4 In case the QR code is unavailable, Tap **【Enter SN】**

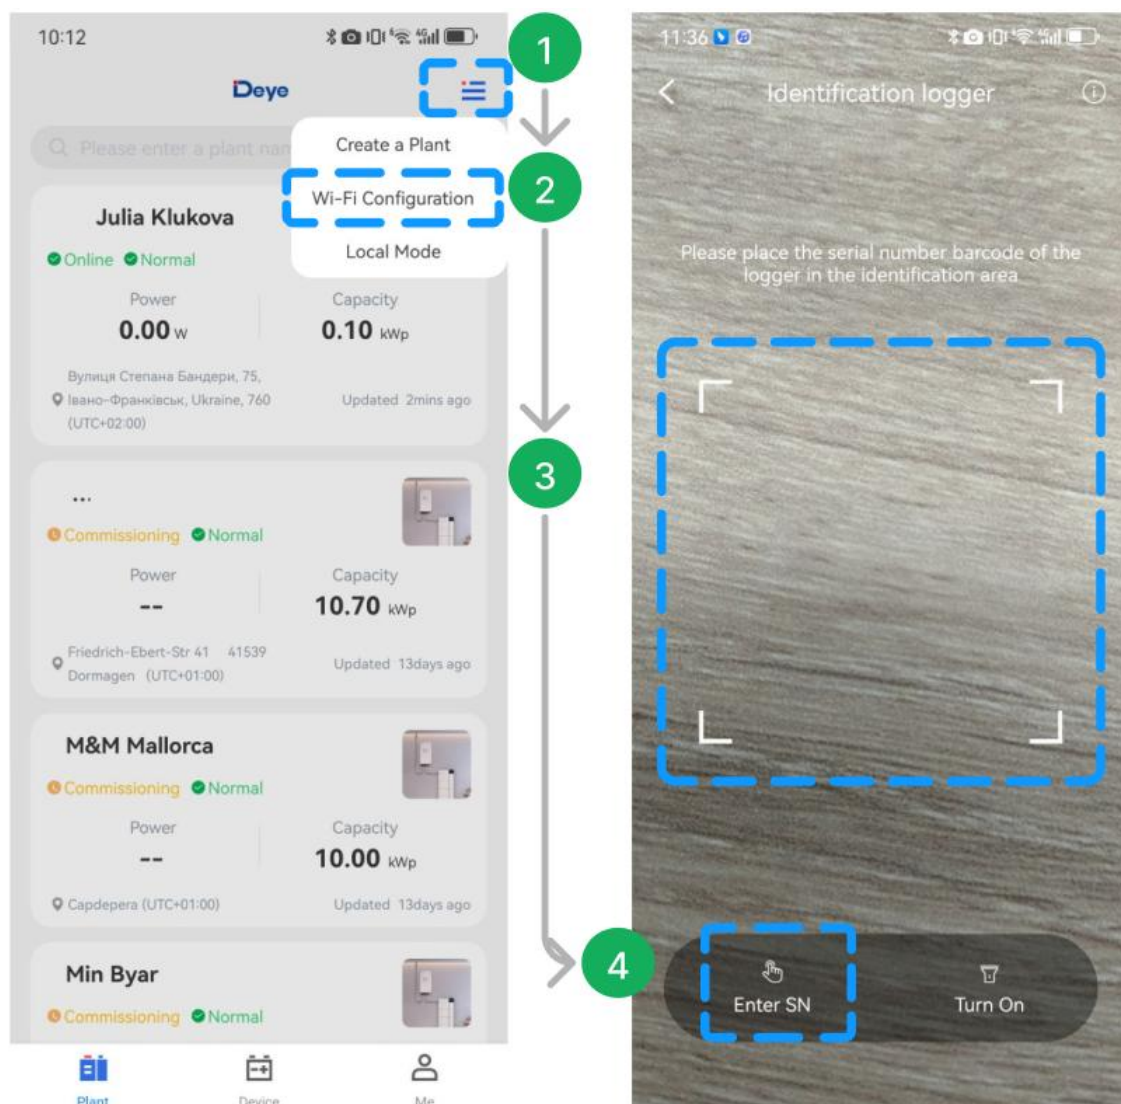

Step 5 Enter the logger SN;

Step 6 Tap **【Confirm】** , jumps to the Wi-Fi configuration page;

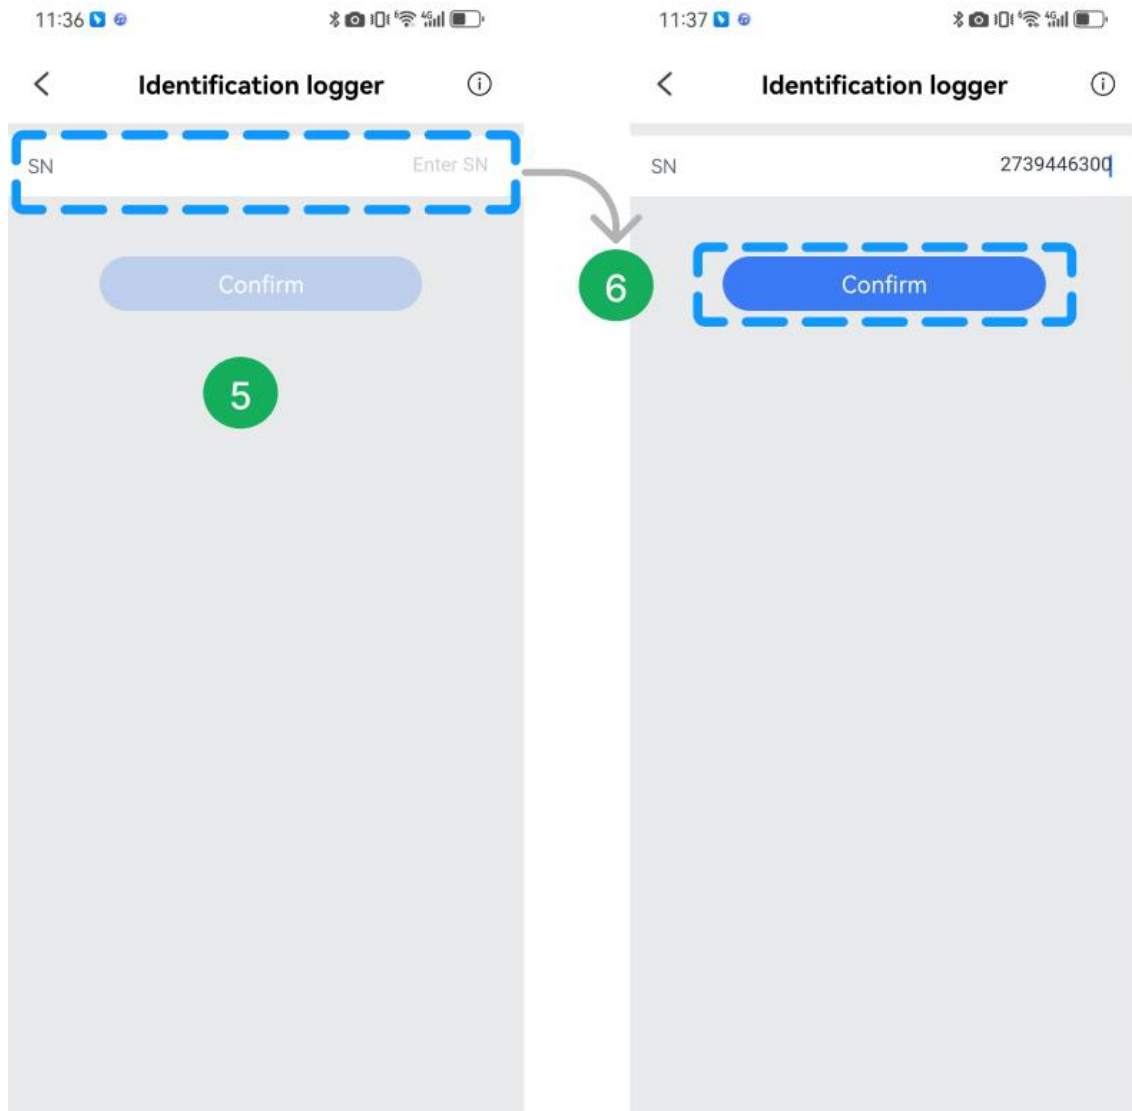


Step 7 Jump to the Wi-Fi configuration page, APP will default to obtaining the present network connected with the phone;

【Switch Network】 is optional and the new currently available wireless network could be entered manually;


Step 8 Enter the password for the WLAN

Step 9 Tap 【Start to configure】

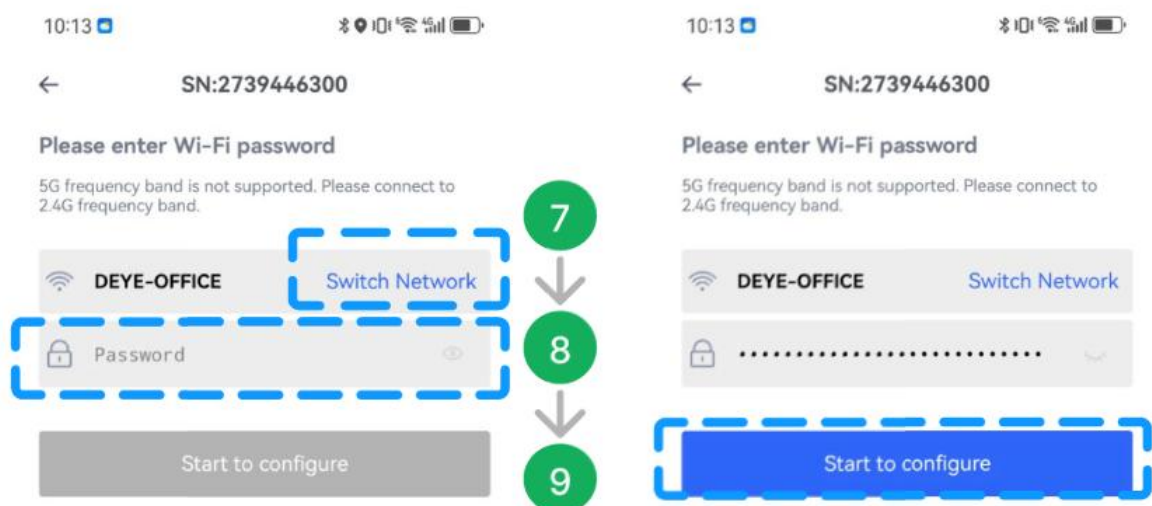

Step 10 Wi-Fi configuration being executed;


Step 11 Tap **【Connect】** to configure logger in the WLAN;

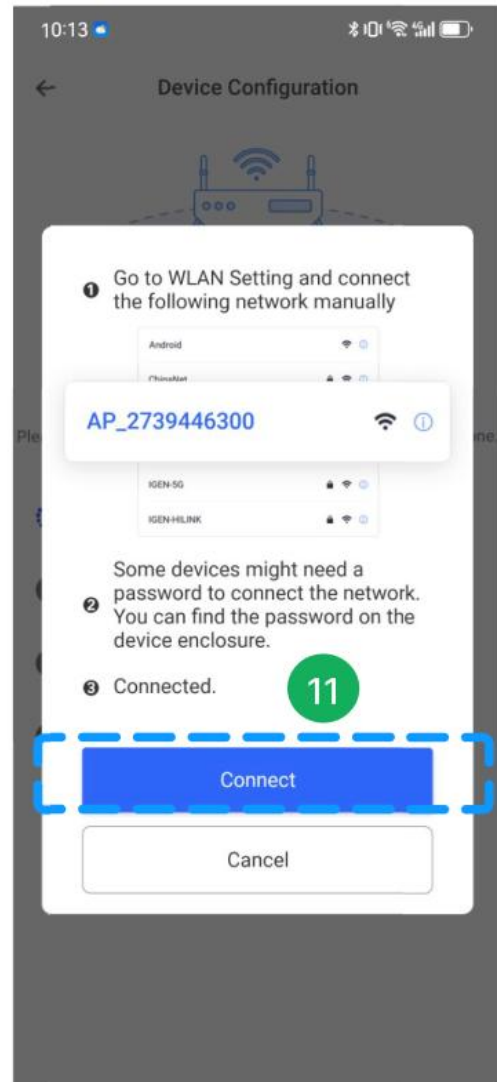

Step 12 Select the WLAN (AP+SN) prompted by the system and enter the password on the logger;

Step 13 Tap 【←】 and back to APP;

Step 14 Connect to device, Configuring, Restart and Verified are executed;

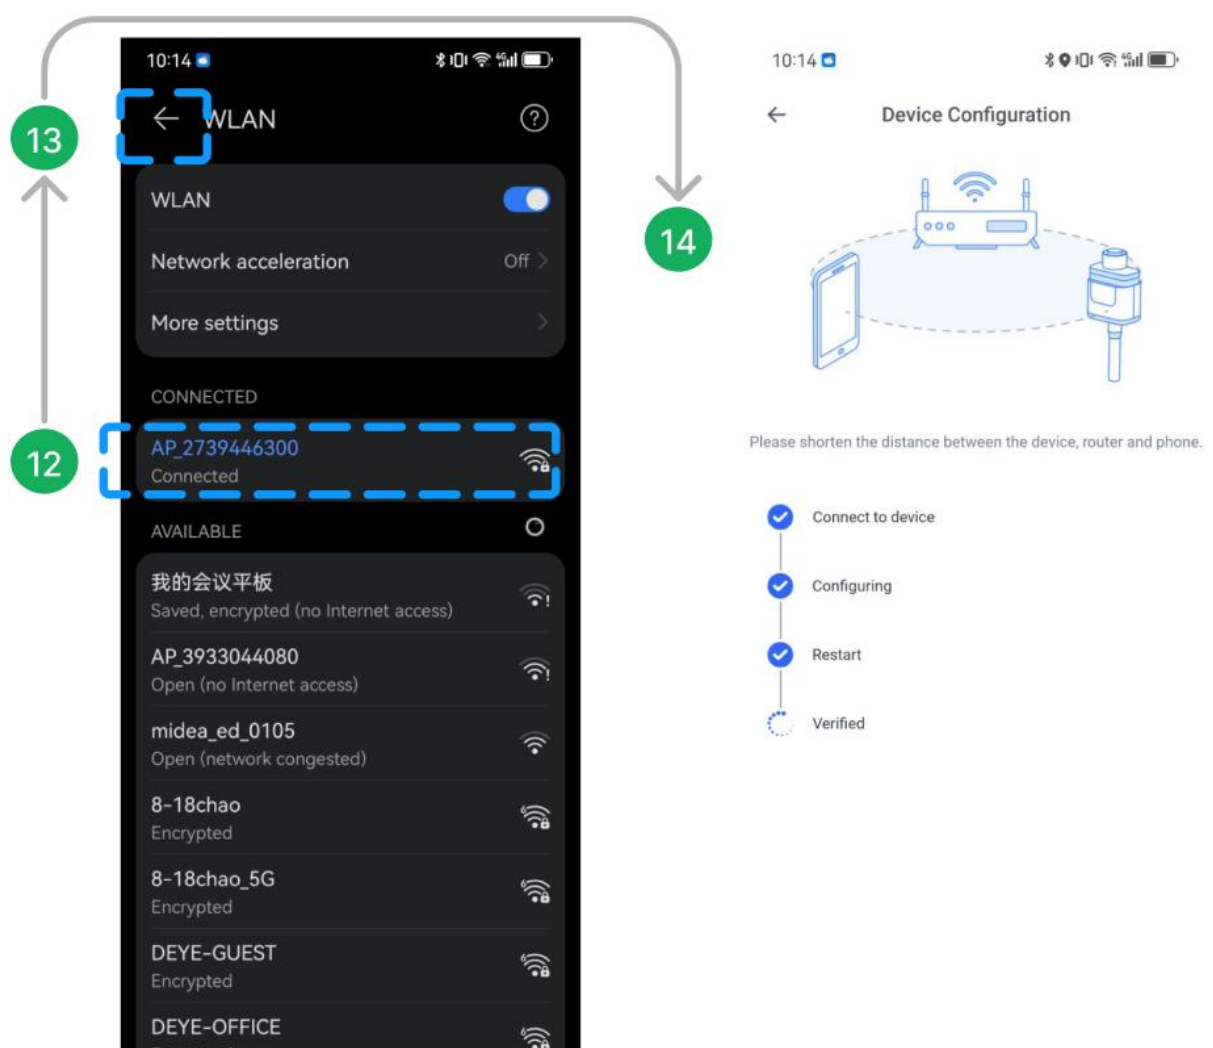

Step 15 After the page displaying “ Configuration succeeded ” , tap **【Done】** to close the page and back to the entering page of the logger.

10:14



Configuration succeeded

Device data will be displayed in 10 mins.
After that, you can check device status in device list.

15

Done